



PRODUCT CATALOG



SURFACES THAT PERFORM.
SOLUTIONS THAT GO FURTHER.

TABLE OF CONTENTS



ACRYTECH **02**

CUSHIONX **12**

FAULTLINE **17**

ROLLX **21**

COURT ACCESSORIES **23**


INSTALLATION TOOLS **25**

WE ARE AT SPORTS

SINCE 1995, AT SPORTS HAS SPECIALIZED IN MANUFACTURING INNOVATIVE SPORTS COATINGS & MATERIALS, CUSHION SURFACES, PORTABLE SURFACES, COURT REPAIR SYSTEMS, AND MUCH MORE THAT ENSURES EVERY GAME IS PLAYED ON THE BEST POSSIBLE FOUNDATION.




ACRYTECH
SPORTS COATINGS



CUSHION X
CUSHION SPORTS SURFACES



ROLLX
PORTABLE SPORTS SURFACES



FAULTLINE
CRACK REPAIR

OFFICIAL SURFACE
INTENNSE

OFFICIAL SURFACE
PPA
PICKLEBALL TOUR

OFFICIAL SURFACE
MLP
MAJOR LEAGUE
PICKLEBALL

OFFICIAL SURFACE
PPR
PROFESSIONAL PICKLEBALL REGISTRY

Member of the
ITF
Foundation



**OUR ACRYTECH LINE OF PRODUCTS FEATURE
TOP-OF-THE-LINE SPORTS SURFACE COATINGS AND
SURFACING MATERIALS**



SCAN FOR MORE DETAILS ON ACRYTECH PRODUCTS:



AT AT SPORTS, WE BELIEVE COLOR IS MORE THAN JUST A DESIGN CHOICE — IT'S AN EXPERIENCE. OUR ADVANCED TECHNOLOGY ENSURES OUR COLORS STAY BRIGHT, VIVID, AND CONSISTENT.

PLAYER'S CHOICE COLORS



SPECIALTY COLORS

SPECIALTY COLORS PRICES BASED ON PIGMENT



CUSTOM COLORS AVAILABLE

Digital displays can alter how colors appear from one screen to another. For true accuracy, please request a draw down from your installer or AT Sports Account Manager. Samples are provided free of charge; only shipping costs apply.



COLOR

100% ACRYLIC LATEX COLOR COAT FORMULATION THAT USES ONLY THE HIGHEST QUALITY PIGMENTS AND COMPOUNDS WITH SELF-CROSSLINKING TECHNOLOGY.

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.05 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.06-.07 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS



COLORFLEX

100% ACRYLIC SELF-CROSSLINKING COATING FOR CUSHIONED SYSTEMS AND OVERLAYS. IDEAL FOR SUBSTANTIAL SUBSTRATE MOVEMENT AND FABRIC CRACK REPAIR SYSTEMS.

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.045-.06 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.06-.07 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS



URETHANE COLOR

POLYURETHANE MODIFIED, SELF-CROSSLINKING ACRYLIC COATING DESIGNED FOR COURTS THAT EXPERIENCE HEAVY TRAFFIC AND USAGE.

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.05 Gal per sq yd	560 lbs
30 - Gallon		300 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.06-.07 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS



LATEX-BASED PRIMER & SEALER

STYRENE-BUTADIENE LATEX PRODUCT DESIGNED TO WATERPROOF UNDERLYING PAINT OR SUBSTRATES. PREVENTS THE LEECHING OF CONCRETE SALTS OR ASPHALT IMPURITIES INTO FOLLOWING LAYERS OF PAINT.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.05-.07 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

WARRANTY: 2 YEARS
COLOR: BLUE
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 3 HOURS



SOLVENT PRIMER & SEALER

SOLVENT-BORNE ACRYLIC PENETRATING SEALER & PRIMER, DESIGNED FOR CONCRETE & SURFACES CONTAINING FLY ASH AND/OR HIGH LEVELS OF LIMESTONE, & CLEAN CONCRETE WITHOUT ACID ETCHING, GRINDING OR MEDIA BLASTING.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	1st coat: 28-39 sq yds/gal 2nd Coat: 39-50 sq yds/gal	560 lbs
5 - Gallon		53 lbs

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 50-100°F
AVERAGE DRY TIME: 1-4 HOURS
AVERAGE CURE TIME: 24 HOURS



SLURRY COAT

SELF-LEVELING 100% ACRYLIC LATEX CEMENT ADMIX COATING FOR SMOOTHING ASPHALT OR PREPARED CONCRETE, FILLING CONTROL JOINTS, DEPRESSIONS, AND CRACKS UP TO 1/4", AND USE OVER EXISTING COATINGS.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.05-.07 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 40-120°F
COLOR: MILKY WHITE
AVERAGE CURE TIME: 48 HOURS



RESURFACER

100% ACRYLIC LATEX SELF-CROSSLINKING RESURFACER
DESIGNED TO BE A FILLING AND REPAIR LAYER.

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.07 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.065-.075 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS



RESURFACER FLEX

100% ACRYLIC LATEX SELF-CROSSLINKING RESURFACER
INTENDED FOR NEW AND EXISTING MEMBRANE OVERLAYS,
ASPHALT AND CONCRETE SUBSTRATES.

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.045-.06 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.065-.075 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS



RESURFACER PLUS

100% ACRYLIC LATEX SELF-CROSSLINKING RESURFACER
DESIGNED TO USE OVER COURT OVERLAYS, CRACK
BRIDGING AND FILLING, & HEAVY RESURFACING.

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.07-.10 Gal per sq yd	560 lbs
30 - Gallon		300 lbs

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 40-90°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS



URETHANE RESURFACER

POLYURETHANE MODIFIED, 100% ACRYLIC SELF-CROSSLINKING RESURFACER DESIGNED FOR CRACK BRIDGING AND FILLING, & HEAVY RESURFACING.

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.05 Gal per sq yd	560 lbs
30 - Gallon		300 lbs

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS




QUICK-DRY

OC FREE, 100% ACRYLIC LATEX SELF-CROSSLINKING COATING DESIGNED TO DRY AND CURE FASTER THAN STANDARD COLOR.

AVAILABLE IN COLORFLEX COATINGS ONLY

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.05 Gal per sq yd	560 lbs
30 - Gallon		300 lbs
5 - Gallon		53 lbs

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS

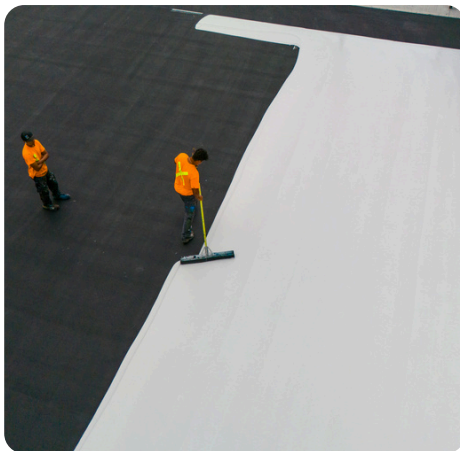

COOLGUARD

TEXTURED, FLEXIBLE, 100% ACRYLIC LATEX SPORTS SURFACE TECHNOLOGY THAT REDUCES SURFACE TEMPERATURES UP TO 30%.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.075-.09 Gal per sq yd	540 lbs
30 - Gallon		295 lbs

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS



COLOR UV+

100% ACRYLIC LATEX SELF-CROSSLINKING SURFACING SYSTEM WITH ADDITIONAL UV RESISTANCE AND MICROORGANISM PROTECTION.

CONCENTRATE		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.05 Gal per sq yd	560 lbs
30 - Gallon		300 lbs

TEXTURED		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon*	.06-.07 Gal per sq yd	520 lbs
30 - Gallon		390 lbs

*39 gal in 55 gal drum

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS

ROLLER SPORTS

100% ACRYLIC LATEX SELF-CROSSLINKING COATING DESIGNED TO PROVIDE A FIBER REINFORCED, HIGHLY ABRASION RESISTANT SURFACE FOR ROLLER SPORTS.

AVAILABLE IN PLAYER'S CHOICE COLORS ONLY

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.04-.045 Gal per sq yd	560 lbs
30 - Gallon		300 lbs



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 72 HOURS

SHUFFLE BOARD

100% ACRYLIC LATEX SELF-CROSSLINKING COATING DESIGNED WITH SELECT SLIP-AGENTS TO PROVIDE AN IDEAL PUCK SLIDE.

AVAILABLE IN PLAYER'S CHOICE COLORS ONLY

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	.06-.07 Gal per sq yd	540 lbs
30 - Gallon		295 lbs



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 50-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 48 HOURS



LINE PRIMER

100% ACRYLIC LATEX EMULSION CLEAR DRYING PRIMER APPLIED PRIOR TO ACRYTECH WHITE LINE PAINT.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
1 - Gallon	480 linear feet at 2" wide	11 lbs

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 48 HOURS



LINE PAINT

100% ACRYLIC LATEX TEXTURED PAINT THAT'S HIGHLY RESISTANT TO ULTRA-VIOLET DEGRADATION.

TENNIS		
DESCRIPTION	COVERAGE	WEIGHT
White: 5 - Gal	480 Linear Feet	53 lbs
White: 1 - Gal		11 lbs

PICKLEBALL*		
DESCRIPTION	COVERAGE	WEIGHT
White: 5 - Gal	480 Linear Feet	53 lbs
White: 1 - Gal		11 lbs

*Higher Sand Volume

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
AVERAGE DRY TIME: 2-4 HOURS
AVERAGE CURE TIME: 24 HOURS



BLACK LIGHT LINE SEALER

A BLACK LIGHT ILLUMINATING INVISIBLE CLEAR LINE PAINT SEALER TO BE APPLIED ON TOP OF COURT LINES.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
5 - Gallon	480 Linear Feet at 2" wide	53 lbs
1 - Gallon		11 lbs

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-120°F
AVERAGE DRY TIME: 1-4 HOURS
AVERAGE CURE TIME: 24 HOURS



URETHANE PRIMER

HIGHLY ABRASION RESISTANT, FLEXIBLE AND STRONG, NON-TACKY, 100% SELF-CROSSLINKING, MULTI-FUNCTION ALIPHATIC WATER-BASED POLYURETHANE PRIMER.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	17-22 Gal per sq yd	510 lbs
30 - Gallon		280 lbs
5 - Gallon		50 lbs

WARRANTY: 2 YEARS
COLOR: HAZY - DRIES CLEAR
AVERAGE DRY TIME: 30 MIN - 1 HOUR
AVERAGE CURE TIME: 4 HOURS



URETHANE CLEAR COAT

HARD, NON-TACKY 100% SELF-CROSSLINKING POLYURETHANE CLEAR COAT DESIGNED TO SEAL & EXTEND THE LIFE OF ALL ACRYTECH COATINGS.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	22-33 Gal per sq yd	500 lbs
30 - Gallon		275 lbs
5 - Gallon		45 lbs

WARRANTY: 2 YEARS
COLOR: WHITE - DRIES CLEAR
AVERAGE DRY TIME: 30MIN - 1 HOUR
AVERAGE CURE TIME: 4 HOURS



DRYING ACCELERANT

99% ISOPROPYL ALCOHOL THAT MAY BE USED AS A MIXING AGENT WITH ACRYTECH COATINGS TO ACCELERATE DRYING AS NEEDED.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	Not Applicable	560 lbs

REPLACE UP TO 1/2 TOTAL WATER WITH DRYING ACCELERANT TO SPEED DRYING.



LIQUID SAND

DENSE, 80-MESH SAND-FILLED NEUTRAL PAINT CARRIER DESIGNED TO REPLACE DRY, BAGGED SAND WHEN MIXED WITH ACRYTECH COLOR CONCENTRATE AND WATER.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
30 - Gallon	.034-.05 Gal per sq yd	460 lbs

WARRANTY: 2 YEARS
DENSITY: 14-15 LBS/GAL
SOLIDS BY WEIGHT: 74% MINIMUM
SAND BY WEIGHT: 63% MAXIMUM

SILICA SAND

PREMIUM SILICA MESH SAND DESIGNED FOR ACRYLIC SPORT COATING SYSTEMS TO PROVIDE CONSISTENT TEXTURE, ENHANCED TRACTION, AND RELIABLE BALL RESPONSE.

PROPERTIES	
DESCRIPTION	WEIGHT
F-55 Mesh	50 lbs
44 Mesh	50 lbs



F-55 MESH: FINE-GRADE SILICA
44 MESH: COARSE-GRADE SILICA


CUSHIONX DELIVERS A PREMIUM CUSHIONED SURFACING SOLUTION ENGINEERED FOR UNMATCHED IMPACT RESISTANCE, EXCEPTIONAL DURABILITY, AND ATHLETE COMFORT



SCAN FOR MORE DETAILS ON CUSHIONX PRODUCTS:




THREE DISTINCT CUSHIONX COMPOSITION LEVELS HAVE BEEN EXPERTLY CRAFTED TO CATER TO DIVERSE AND SPECIALIZED USAGE NEEDS.

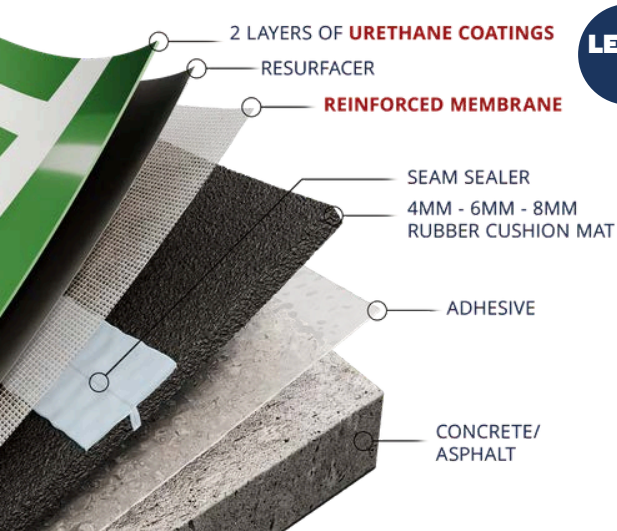

LEVEL 3

HIGH-USE COMMERCIAL & TOURNAMENT USAGE


DESIGNED FOR TOP-TIER PERFORMANCE, LEVEL 3 ENHANCES LEVEL 2 WITH THREE LAYERS OF URETHANE FLEX COATINGS. THIS CONSTRUCTION WITHSTANDS HEAVY USE WHILE OFFERING EXCEPTIONAL IMPACT ABSORPTION AND COMFORT.

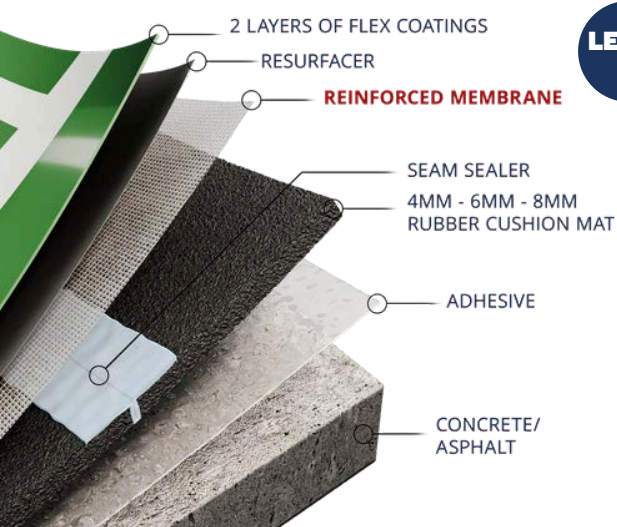

LEVEL 2

LIGHT - MODERATE COMMERCIAL USAGE


CRAFTED FOR SUPERIOR RESILIENCE, LEVEL 2 ENHANCES THE CAPABILITIES OF LEVEL 1 BY INCORPORATING AN EXTRA REINFORCED MEMBRANE LAYER TO MEET THE DEMANDS OF COMMERCIAL ENVIRONMENTS.

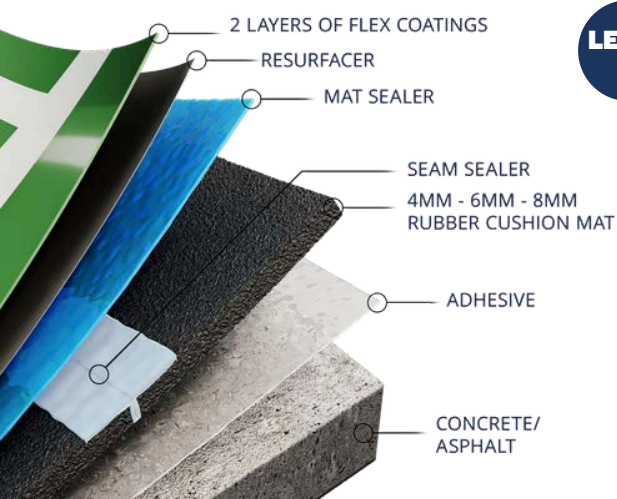

LEVEL 1

RESIDENTIAL USAGE ONLY

IDEAL FOR HOMES AND LIGHT-USE COURTS, LEVEL 1 INCLUDES A 4MM, 6MM, OR 8MM CUSHION MAT WITH THREE LAYERS OF FLEXIBLE COATINGS OFFERING DURABILITY AND COMFORT FOR RECREATIONAL PLAY.

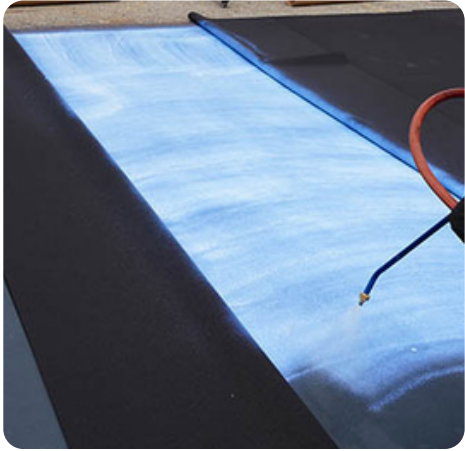


LATEX-BASED ADHESIVE

CARBOXYLATED STYRENE BUTADIENE PRESSURE SENSITIVE ADHESIVE DESIGNED FOR PERMANENT ADHESION OF MAT OVERLAYS OVER CONCRETE AND ASPHALT.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	60 sq ft per Gal	500 lbs
30 - Gallon		265 lbs
5 - Gallon		50 lbs

APPLICATION TEMPERATURE: 34-130°F
COLOR: WHITE - DRIES CLEAR
AVERAGE DRY TIME: 1-6 HOURS
AVERAGE CURE TIME: 24 HOURS

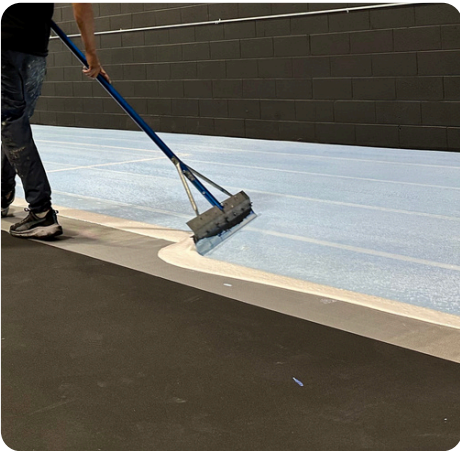

URETHANE ADHESIVE

SOLVENT FREE, ELASTIC, VISCOUS TWO-PART POLYURETHANE ADHESIVE DESIGNED FOR PERMANENT ADHESION OF MAT OVERLAYS OVER CONCRETE AND ASPHALT SUBSTRATES.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
5 - Gallon	60 sq ft per Gal	53 lbs

WARRANTY: 5 YEARS
APPLICATION TEMPERATURE: 50-130°F
AVERAGE DRY TIME: 45 MIN WORKING TIME



CUSHION MAT

RUBBER SHOCK CUSHION MAT OVERLAY PRODUCED WITH 86% POST-CONSUMER RECYCLED CRUMB RUBBER.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
4 MM	5 ft x 60 ft	185 lbs
6 MM	5 ft x 60 ft	275 lbs
8 MM	5 ft x 60 ft	360 lbs

AVAILABLE IN 4 MM - 6 MM - 8 MM



SEAM SEALER

SEALER DESIGNED TO PERMANENTLY BOND AND SEAL CUSHION MATS WHILE ENSURING A TIGHT, WATERPROOF SEAL THAT PREVENTS SHIFTING AND DAMAGE.

WARRANTY: 5 YEARS
APPLICATION TEMPERATURE: 50-130°F
AVERAGE DRY TIME: 1-3 HOURS

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
1 - Gallon	1 Gal per 8 Mat Rolls	11 lbs



MAT SEALER

A CARBOXYLATED STYRENE BUTADIENE LATEX SEALER DESIGNED TO PROVIDE A STRONG TOP SEAL FOR MAT SURFACES TO PROTECT AGAINST WEAR AND TEAR.

APPLICATION TEMPERATURE: 36-130°F
COLOR: BLUE - DRIES CLEAR
AVERAGE CURE TIME: 30MIN - 1 HOUR

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	90 sq ft per Gal	500 lbs
30 - Gallon		265 lbs
5 - Gallon		53 lbs



SQUEEGEE CUSHION

SQUEEGEE APPLIED CUSHION IS OUR PROPRIETARY MIXTURE OF 100% ACRYLIC LATEX, MINERAL FILLERS, AND FINELY GRADED EPDM AND SBR RUBBER PARTICLES THAT RESULTS IN A 3.5MM CUSHION SURFACE.

WARRANTY: 2 YEARS
COLOR: AVAILABLE IN ALL COLORS
APPLICATION TEMPERATURE: 36-130°F

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	Varies by layer	560 lbs
30 - Gallon		300 lbs



CUSHION X
EXTREME

A CRACK-RESISTANT, FREE-FLOATING OVERLAY SYSTEM FEATURING A CLOSED-CELL FOAM CUSHION LAYER BONDED TO A NON-WOVEN FLEECE BACKING WITH INTEGRATED STABILIZING LAYERS FOR ENHANCED TENSILE STRENGTH AND CRACK-BRIDGING PERFORMANCE.

ENGINEERED FOR MODERATELY TO SEVERELY DETERIORATED COURTS AS AN ALTERNATIVE TO FULL RECONSTRUCTION

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
6 MM Cushion Mat, Adhesive, Bamilex	6 ft x 60 ft (Custom Lengths Available)	300 lbs

FAULTLINE CRACK REPAIR PROVIDES A PROFESSIONAL SOLUTION FOR MAINTAINING THE QUALITY AND PERFORMANCE OF YOUR COURTS



SCAN FOR MORE DETAILS ON FAULTLINE PRODUCTS:





FAULTLINE CRACK REPAIR KIT

A PROPRIETARY, PATENT PENDING, SYSTEM FOR PERMANENTLY REPAIRING EXISTING CRACKS ON SPORTS SURFACES.

FAULTLINE CRACK REPAIR SYSTEM IS THE THINNEST, PERMANENT, FULLY ADHERED SYSTEM CURRENTLY ON THE MARKET.

**KIT INCLUDES FAULTLINE
POLYFIBER FABRIC AND TAPE**

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
1 Crack Repair Kit	300 linear ft	33 lbs



SPORT PATCH

100% ACRYLIC LATEX BINDER, WHEN MIXED WITH PORTLAND CEMENT & SAND, PRODUCES A SEMI-FLEXIBLE LATEX CONCRETE THAT IS IDEAL FOR PATCHING DEPRESSIONS & FILLING CRACKS.

APPLICATION TEMPERATURE: 50-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	Varies depending on crack size	500 lbs
30 - Gallon		265 lbs
5 - Gallon		53 lbs



SB GLUE

A CARBOXYLATED STYRENE BUTADIENE LATEX GLUE DESIGNED SPECIFICALLY FOR MODERN FABRIC AND FIBERGLASS CRACK REPAIR SYSTEMS.

WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 36-130°F
COLOR: MILKY WHITE - DRIES CLEAR
AVERAGE DRY TIME: 30MIN - 1 HOUR

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
55 - Gallon	15-25 linear ft/gal	500 lbs
30 - Gallon		265 lbs
5 - Gallon		53 lbs



TEST METHODS IN CONFORMITY
WITH ASTM D1668-94 AND
ASTM D579-90

FIBERGLASS

HIGH STRENGTH, CRACK AND WRINKLE RESISTANT FIBERGLASS MESH MEMBRANE INTENDED FOR USE IN REPAIRING ASPHALT AND CONCRETE SUBSTRATES.

PROPERTIES	
DESCRIPTION	WEIGHT
36 in x 150 ft	Varies depending on roll size
9 in x 150 ft	



ADHERES FIRMLY TO
WITHSTAND HEAVY TRAFFIC
STRESSES

POLYESTER | POLYFIBER

HIGH STRENGTH AND FLEXIBLE MEMBRANE & TAPE DESIGNED TO SEAL AND REINFORCE SURFACE CRACKS & SEAMS.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
Polyester T325	40 in x 108 yds	Varies depending on roll size
Polyfiber	18 in x 180 ft	
Polyfiber	36 in x 180 ft	



WARRANTY: 2 YEARS
APPLICATION TEMPERATURE: 34-130°F
AVERAGE DRY TIME: 1-3 HOURS
AVERAGE CURE TIME: 24 HOURS

CRACK FILLER REPAIR

POURABLE ACRYLIC LEVELER/CRACK FILLER DESIGNED TO BE USED WITH RESURFACER OR COLOR, SAND, AND WATER TO REPAIR SMALL CRACKS AND DEPRESSIONS.

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
5 - Gallon	Varies depending on crack size	53 lbs



FILL-N-FIX

ADHESIVE/SEALANT WITH HIGH INITIAL TACK, DESIGNED FOR USE AS A CRACK AND JOINT FILLER FOR ASPHALT AND CONCRETE SUBSTRATES.

WARRANTY: 2 YEARS
 APPLICATION TEMPERATURE: 35-140°F
 AVERAGE DRY TIME: 30 MIN - 1 HOUR
 TACK FREE TIME: 20 MIN

PROPERTIES		
DESCRIPTION	COVERAGE	WEIGHT
Case of 12 - 10.1 fl. oz. cartridge	Varies depending on crack size	13 lbs per case

**OUR PORTABLE SPORTS SURFACES TRANSFORM ANY LEVEL,
HARD FOUNDATIONAL SURFACE INTO A HIGH-PERFORMANCE
PLAYING COURT**



SCAN FOR MORE DETAILS ON ROLLX PRODUCTS:





ROLLX COURTS

A PREFABRICATED COURT ENGINEERED TO PERFORM IN BOTH INDOOR AND OUTDOOR SETTINGS ON ANY LEVEL- UNDERLYING HARD SURFACE. MADE FROM A REINFORCED MEMBRANE & 4MM CUSHION MAT THAT MAKES IT EXTREMELY DURABLE.



AVAILABLE IN ANY PLAYER'S CHOICE OR SPECIALTY ACRYTECH COLOR.
CUSTOM COLORS AVAILABLE UPON REQUEST.

NEW ROLLX COURTS

Engineered to offer complete design flexibility, allowing for customization of surface aesthetics to meet specific project requirements. Whether for branding integration, facility coordination, or event-specific applications, each court can be tailored in layout and visual design.

RECONDITIONED ROLLX COURTS

Need a cost-effective solution without sacrificing quality? Reconditioned RollX Courts are fully repaired and recoated to deliver performance that feels like new. These courts are available in the same customization options as new courts.


PRE-OWNED ROLLX COURTS

We also offer Pre-owned RollX Courts at an additional discount for a fast-deploy solution without the need for surface refinishing. These are sold as-is and are a great fit for training facilities or practice play.

AT SPORTS OFFERS SPECIALIZED TOOLS DESIGNED TO MOVE & HANDLE YOUR ROLLX COURT WITH EASE:

- ✓ Fork & Beam System – Ideal for forklift-compatible transport.
- ✓ Loading Dolly – A compact, maneuverable solution for roll loading and unloading.

COURT ACCESSORIES

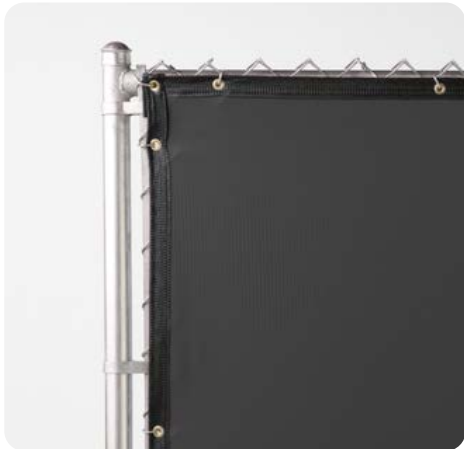

WINDSCREENS

DURABLE, CUSTOMIZABLE WINDSCREENS DESIGNED TO ENHANCE PRIVACY, REDUCE WIND, AND IMPROVE BALL VISIBILITY.

AVAILABLE COLORS



CUSTOM LOGOS AVAILABLE

PROPERTIES	
MATERIAL	HEIGHTS
9 Oz Vinyl Coated Polyester	6 ft - 9 ft - 12 ft
10 Oz Vinyl	5 ft +

**13 Oz. Vinyl & 10 Oz. VCP Available Upon Request*



TENNIS NETS, POSTS, & ACCESSORIES

DESIGNED TO MEET STANDARD SPECIFICATIONS WHILE DELIVERING RELIABLE TENSION AND A CRISP NET PROFILE.

NET DIMENSIONS: 42 FT LENGTH X 3.5 FT
CENTER HEIGHT
POST HEIGHT: REGULATION 42 INCHES
ABOVE GROUND

DESCRIPTION
3.0 mm Single Top with Center Strap
3.0 mm Double Top 6 with Center Strap
Net Posts 2 7/8 inches
Net Crank
Center Net Anchor



SELKIRK SEMI-PRO PORTABLE NET

THIS SEMI-PERMANENT PRO PICKLEBALL NET FEATURES AN INNOVATIVE CORROSIVE-RESISTANT ALUMINUM FRAME FOR MAINTAINING THE EXCEPTIONAL QUALITY PROS TRUST.

PROUD DISTRIBUTOR OF:



FEATURES
Bow-spring tech maintains top tension
Ships in a box and assembles with minimal tools
Weighing just 114 lbs for easy movement

COURT ACCESSORIES



DOMINATOR IN-GROUND POST & NET

HEAVY-DUTY, RUST-PROOF ALUMINUM IN-GROUND PICKLEBALL NET SYSTEM THAT MEETS USA PICKLEBALL OFFICIAL REGULATIONS.

FEATURES
Each post comes with a separate sleeve to be removed from the ground when not in use
Built with 1/8" thick aluminum walls
6061 T6 aluminum with stainless steel hardware

PROUD DISTRIBUTOR OF:

DOMINATOR



DOMINATOR PRO MAX ROLLING NET

A COMPLETELY RUST-PROOF ALUMINUM PICKLEBALL NET FEATURING LOCKING WHEELS WITH 3" SQUARE SIDE POSTS AND ADJUSTABLE NET TENSION.

FEATURES
High-quality 6061 T6 aluminum
Locking wheels and a hand lever for easy movement
Attached hand crank, top wire cable, and fiberglass dowels provide adjustable tension
USA Pickleball regulation-size net system

PROUD DISTRIBUTOR OF:

DOMINATOR

INSTALLATION TOOLS



IDEAL FOR COURT PROFESSIONALS AND MAINTENANCE CREWS

SQUEEGEES

BUILT FOR PROFESSIONAL SURFACE PREP AND PAINT APPLICATION, THESE TOOLS ENSURE SMOOTH COATINGS, SHARP LINES, AND DURABLE PERFORMANCE.

DESCRIPTION
36 in Round Edge Squeegee
36 in Replacement Squeegee Blade
48 in Round Edge Squeegee
48 in Replacement Squeegee Blade
V-Squeegee
Notched Squeegee Head



MADE TO WITHSTAND TOUGH JOBSITE CONDITIONS & RELIABLE PERFORMANCE

SCRAPERS & MIXERS

ENGINEERED FOR SURFACE PREP AND MIXING TASKS, THESE TOOLS DELIVER PRECISION, DURABILITY, AND CONSISTENT RESULTS FOR PROFESSIONAL COATING APPLICATIONS.

DESCRIPTION
18 in Heavy Duty Floor Scraper
18 in Floor Scraper Replacement Blade
36 in Hex Shaft Paddle Mixer
48 in Hex Shaft Paddle Mixer



INSTALLER MUST-HAVES FOR THE DAY TO DAY EFFICIENCIES

INSTALLER MUST-HAVES

ESSENTIAL FOR STORAGE, PREP, AND CLEANUP, THESE TOOLS ENSURE SAFE HANDLING, SURFACE PROTECTION, AND RELIABLE CONTAINMENT OF COATINGS AND MATERIALS.

DESCRIPTION
Siphon Pump
24 in Paper Rolls
5 Gal Pail With Lid (Bulk - 120 unit option available)
5 Gal Bucket Holder

QUESTIONS?

GET CONNECTED WITH A COURT EXPERT

770-734-3000

